
Kilter

Kilter is a new take on an architectural lighting staple.

Available as a light source or a complete wall-mounted light fixture,
Kilter is Tala's first entry into true architectural lighting.




Kilter means *balance*.

Mirroring the tubular shape of the bulb, the circular wall fixture creates an anchor point for the linear bulb to sit, perfectly, in its centre.

Unlike other 'Linestra' / S14d bulbs on the market, Kilter is designed with a frosted glass that subtly exposes and celebrates the internal filament inside when illuminated.

Further, the lightly frosted finish reduces the dark spots often found at the ends of a typical S14d bulb.

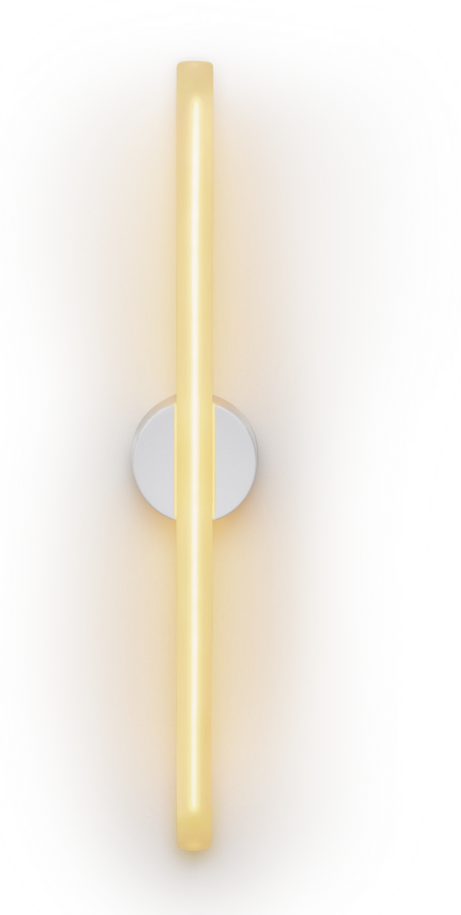


Kilter Wall Light


tala.

Mounting flush to the wall to create a seamless exchange with the environment, the circular aluminium shell is designed to house the Kilter S14d light sources.

A rubber gasket protects the bulb and fixture from moisture, making it an ideal bath bar or vanity light, while the clean and contemporary construction references its heritage in architectural lighting.

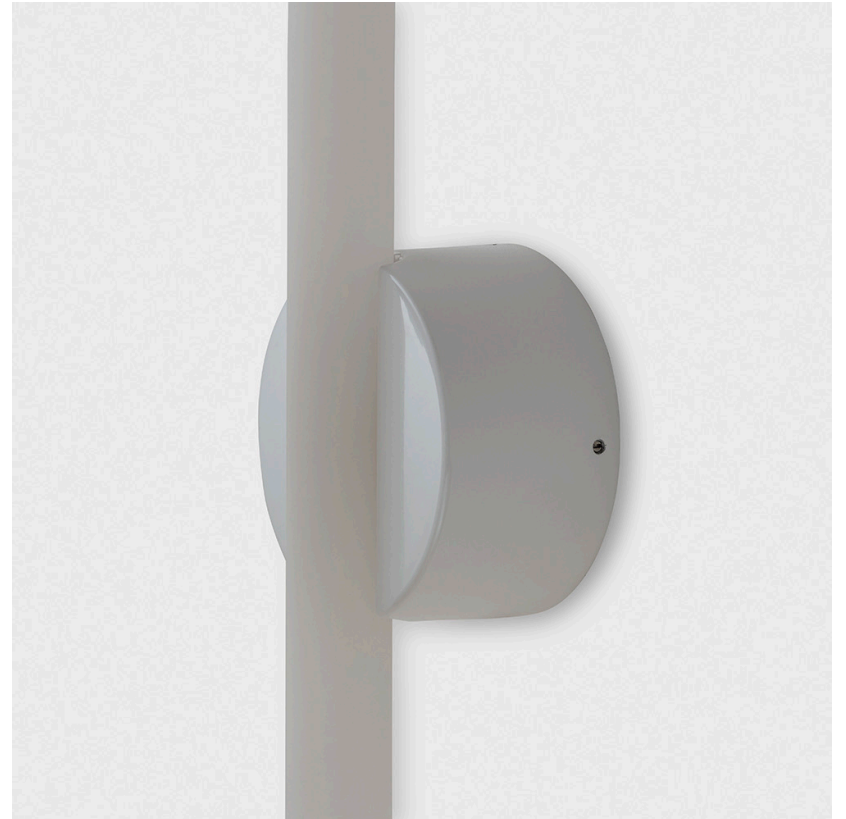

- IP44 and wet rated – suitable for outdoors and bathroom
- Tubular shape
- Two bulb lengths: 640mm and 500mm
- Both bulb lengths available in 2200K and 2700K
- ADA compliant
- Circular aluminium fixture in three distinct finishes
- Frosted glass bulb finish with subtle exposed filament design
- Dimmable LED filaments
- Proprietary ETL socket designed for US market
- 15,000-hour lifespan
- Tala logo detailing on fixture

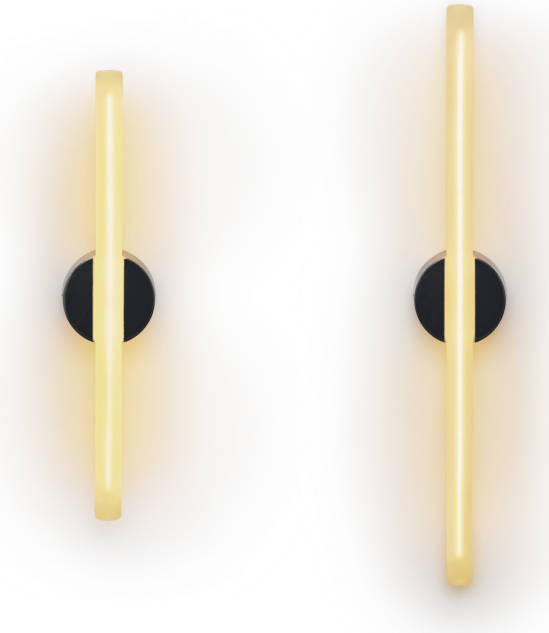




Commonly found in architectural spaces, the industrial-style finish offers a multitude of uses; from commercial workspaces to loft-style apartments.



The Dark Grey colour is a beautiful counterpoint to the smooth, tubular light source.

Enamel powder-coated dark grey/off-black
(RAL 7016, Anthracite Grey, High Gloss)

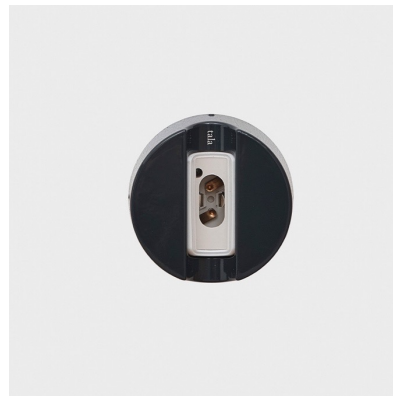

Dark Grey

tala.

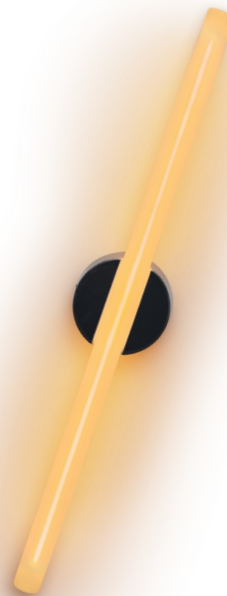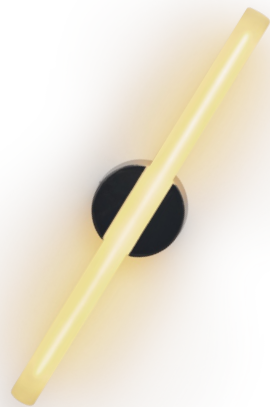

White


tala.



Complete with a high-gloss, enamel-style finish, the White fixture is ideal for interior wet-rooms like bathrooms and kitchens.





Perfectly displayed in pairs, this version would be suitable for illuminating vanity mirrors or accenting functional light sources.

Enamel powder-coated off-white
(RAL 9003, Signal White, High Gloss)

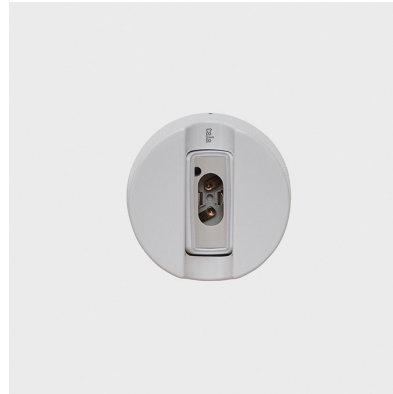

White

tala.

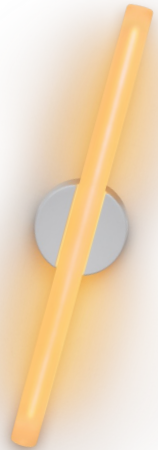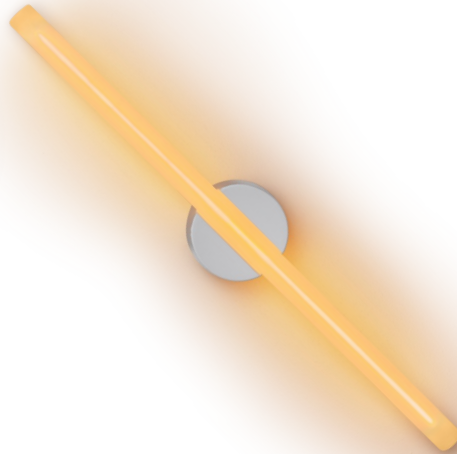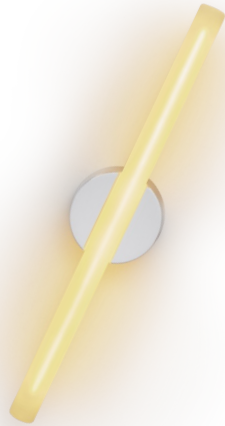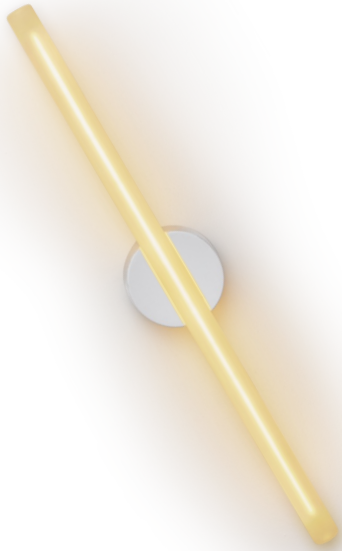



Pictured: Kiter Wall Light in Dark Grey, Small, 2700K

Min – Max Delivered CCT	2200K or 2700K
Percent Flicker (IES)	<5%
Lifetime	15,000 hrs*
Input Voltage	220-240V
CRI	95
Lumens	375lm
Rated Power	6W
Bulb Shape	T30
Base Cap	S14D
Glass Finish	Frosted
Dimensions (ø x L mm)	30 x 500 or 640

For functional rooms where illumination is important for carrying out tasks, consider a higher kelvin light source, such as 2700K.

For rooms with multiple light sources, or where mood is important, choose a lower kelvin bulb, such as 2200K, to achieve warmth and atmosphere.

How “warm” or “cool” the light emitted by a source is, comparable to the sunlight from sunrise to sunset is measured in Kelvin (K)

2700K

2200K



2200 Kelvin

tala.



640mm

500mm

2700 Kelvin

tala.



640mm

500mm





Colour temperature - how we measure a light's colour is measured in Kelvin

Circadian rhythm - our sleep and wake cycle, dictated by the colour temperature we are exposed to

Cool midday light - suppresses melatonin, making us feel more alert

Warm evening light - releases melatonin, preparing us for sleep

Intended Settings

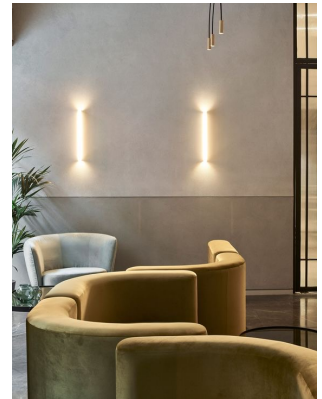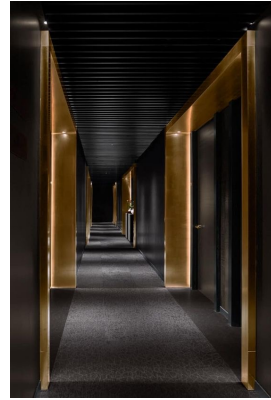

Recommended:

Varilight V-Pro

Casambi CBUTED

Dmax by Domintell 420SL

Dmax by Domintell 420BLE

Lutron RA2 Select RRK-R25NE-240

Compatible:

Bticino L4408N / L4410N / L4411N

Busch-Jaeger 6523U-102

Eltako EUD12NPN-UC / EUD61NPN-UC

EPV Dimmtronic M1000-3.3 / PAB 315

Gira System2000 / System3000

Hamilton LEDIT-B100

HueRich HD-E100M-H

LE Controls 6TEP200 / 6TEP400 / 6TRD200 / 6TRD400

Legrand Arteor / Mosaic / Universal

Lumex LT1D450LSWE

Lutron GRAFIK Eye QS with NGRX-ELVI-CE / GXI-3104

Lutron HomeWorks QS HQRK-R25NE-240 /

HQRMR25NE-

240 / LQSE-4A1-D / LQSE-4A-D / QSNE-4A-D /

MQSE-2A1-D / MQSE-3A

Mode Tiger

Osram HTi DALI 315

Rako RAK-4T / RMT500

Relco 101 LED / 5000 LED / RT81 LED / RTS1 LED

Tecnel TE7636

Vadsbo LD200 / LD220 / VD200-300 / LDN200

Varilight V-Pro

Vimar Eikon 20135.1/20136.1

Wandsworth Electrical RTD120 / WLC 4x150TD /

WLC IR1x150TD

Zano ZBARLED1000

Thank you