

MINIPIPISTRELLO



code: **620/J/DIM/T/BI**








DESIGN **GAE AULENTI** 2013

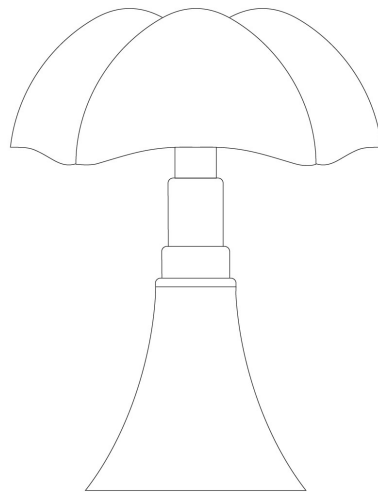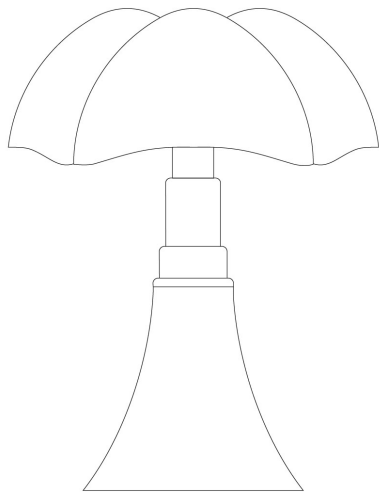

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION:	INTERNAL	TIPOLOGY:	TABLE LAMPS	
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE		
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE		
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4	
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1	
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -			
DEVICE SPECIFICATIONS	TYPE OF EMISSION: DIFFUSED POWER: 9 W FLOW LAMP: 374 lm BEAM ANGLE: - DEVICE EFFICIENCY: 41.6lm/W IMPACT RESISTANCE: - GLOW WIRE TEST: -	POWER SUPPLY CABLE LENGTH: 190cm LENGTH OF HANGING CABLE: - SUPPLY: INCLUDED POWER SUPPLY ASSEMBLY: EXTERNAL TYPE OF DIMMING: TOUCH ON THE BODY VOLTAGE: 230 V		
	POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    			
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA			

MINIPISTRELLO

code: *620/J/DIM/T/BI*


DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

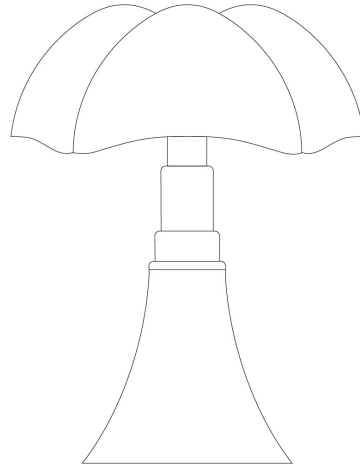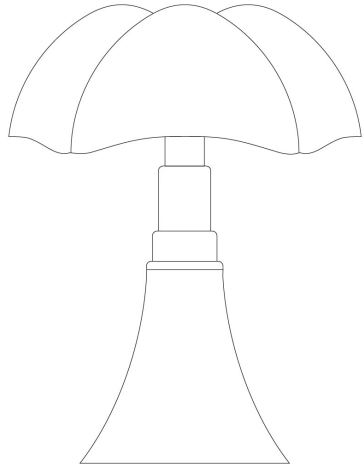

C-Halplanes
180.0 0.0
270.0 90.0

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

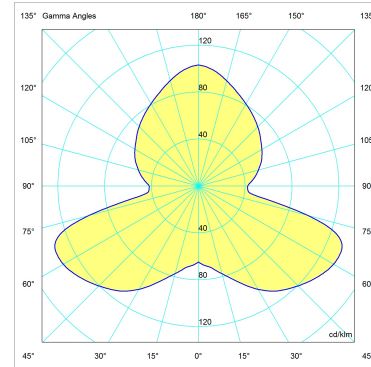

MINIPISTRELLO

code: *620/J/DIM/T/BI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

