

LINESCAPES

PENDANT HORIZONTAL

NEMO STUDIO

Family of floor, ceiling and wall elements, efficient with an highly versatile linear luminous output. Body in aluminium extruded and opal white polycarbonate diffuser. Horizontal cantilever wall version supplied with kit for connection with remote driver. White or black finishing with elements in grey painted on the floor and wall versions.



L130 LED | 2700K

LAMPING

Source	linear LED
Total power	24W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	945lm (luminous output)
Typ cri	80
Energy class	A+
Ip class	44
Materials	Aluminium + PC + ABS
Notes	cable lenght 2,5mmetal cable lenght 3m, electrical cable lenght 3m, orientable 360°

Codes

LIN LW2 5D

LIN LN2 5D

Structure

white



black

PACKAGE

Package 01

53x53x35 cm / Gross weight: 3.5 Kg

Certificazioni

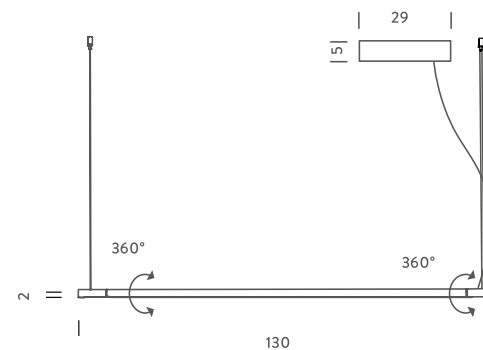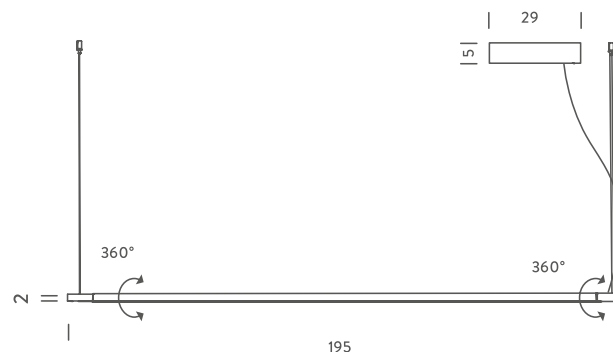

L130 LED | 3000K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1125lm (luminous output)
Typ cri	80
Energy class	A+
Ip class	44
Materials	Aluminium + PC + ABS
Notes	metal cable lenght 3m, electrical cable lenght 3m, orientable 360°

Codes

LIN LWW 5D

LIN LNN 5D

Structure

white



black

PACKAGE

Package 01

53x53x35 cm / Gross weight: 3.5 Kg

Certificazioni

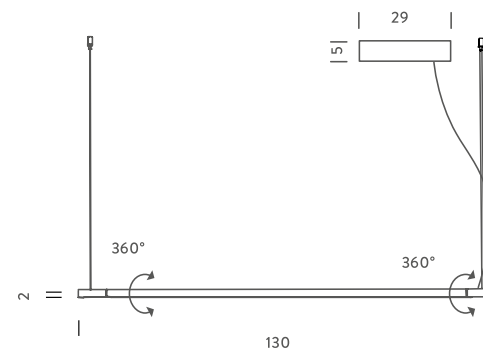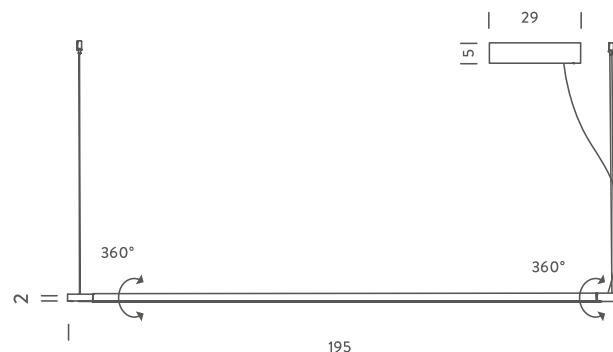

L200 LED | 2700K

LAMPING

Source	linear LED
Total power	40W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1500lm (luminous output)
Typ cri	80
Energy class	A+
Ip class	44
Materials	Aluminium + PC + ABS
Notes	metal cable lenght 3m, electrical cable lenght 3m, orientable 360°

Codes

LIN LW2 5E

LIN LN2 5E

Structure

white



black

PACKAGE

Package 01

53x53x35 cm / Gross weight: 3.5 Kg

Certificazioni

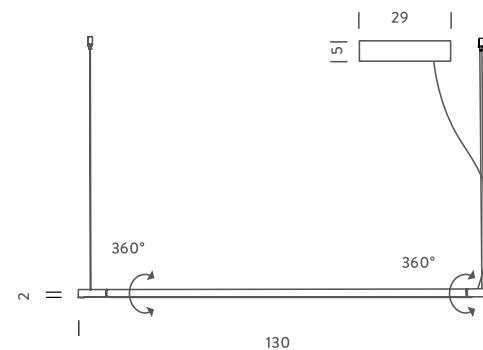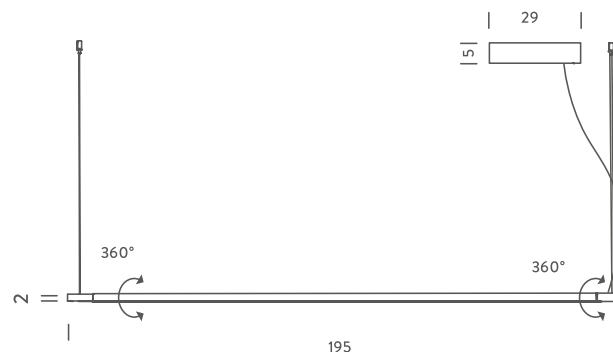

L200 LED | 3000K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1765lm (luminous output)
Typ cri	80
Energy class	A+
Ip class	44
Materials	Aluminium + PC + ABS
Notes	metal cable lenght 3m, electrical cable lenght 3m, orientable 360°

Codes

LIN LWL 5E

LIN LNN 5E

Structure

white

black

PACKAGE

Package 01

53x53x35 cm / Gross weight: 3.5 Kg

Certificazioni

