


Luminaire

Code 1752030A
Name LA PETITE wall black

Measur.

Code FTS1602859
Name LA PETITE wall black

| | | | | | | | |
|---|-----------------------------------|---|------------------|---|----------------|---|--------------|
| Luminaire Flux | 325.82 lm | Luminaire Power | 6.00 W | Efficacy | 54.30 lm/W | Efficiency | 65.29% |
| Lamps Flux | 499.00 lm | Maximum value | 206.42 cd/klm | Position | C=0.00 G=0.00 | CG | Asymmetrical |
| Round Luminaire Round Luminous Area | | Diam. Diam. | 190 mm 188 mm | Height Height | 367 mm 0 mm | | |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | | 0.027759 m2 0.000000 m2 0.000000 m2 | | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | | 0.000000 m2 0.000000 m2 0.006716 m2 | |
| Coordinate system Date Measurement Distance | | CG 28-09-2015 0.00 | | Symmetry Type Maximum Gamma Angle Measurement Flux | | Asymmetrical 180 499.00 lm | |
| LAMP. LED 6W E14 2700K FROST P40 | | | | | | | |
| C.I.E. F UTE | 48 79 96 85 65 0.56 E + 0.10 T | | | D DIN 5040 B NBN | | B31 BZ 4 | |

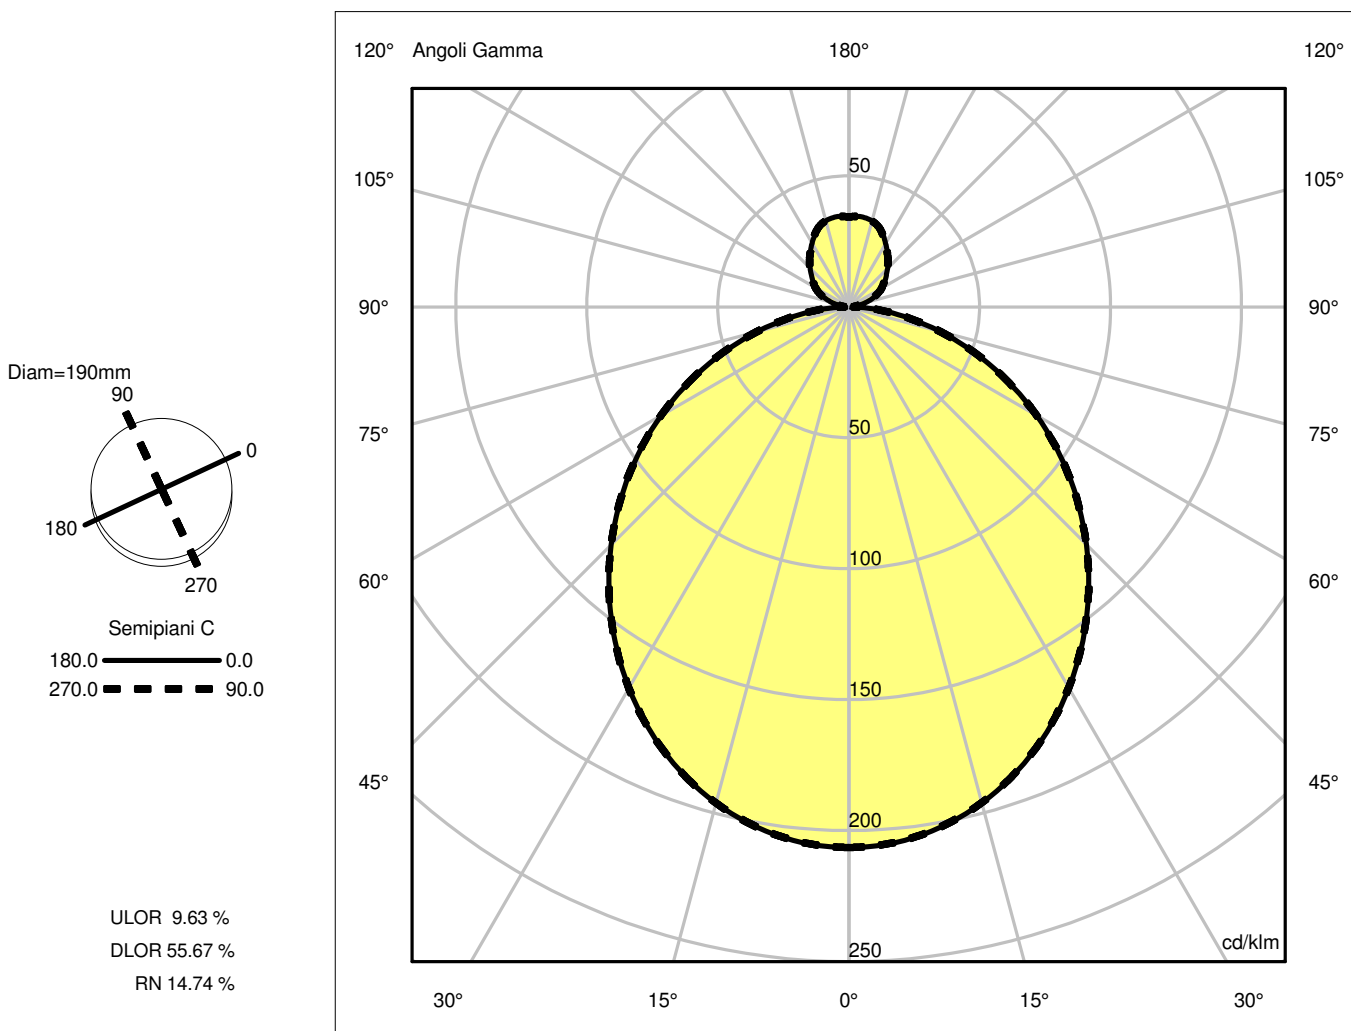

Luminaire

Code 1752030A
Name LA PETITE wall black

Measurerm.


Code FTS1602859
Name LA PETITE wall black

| | | | | | | | |
|----------------------------------|-----------------|-----------------|---------------|-----------------------------|---------------|------------|--------------|
| Luminaire Flux | 325.82 lm | Luminaire Power | 6.00 W | Efficacy | 54.30 lm/W | Efficiency | 65.29% |
| Lamps Flux | 499.00 lm | Maximum value | 206.42 cd/klm | Position | C=0.00 G=0.00 | CG | Asymmetrical |
| Round Luminaire | | Diam. | 190 mm | Height | 367 mm | | |
| Round Luminous Area | | Diam. | 188 mm | Height | 0 mm | | |
| Horizontal Luminous Area | 0.027759 m2 | | | Emitting area on Plane 180° | 0.000000 m2 | | |
| Emitting area on Plane 0° | 0.000000 m2 | | | Emitting area on Plane 270° | 0.000000 m2 | | |
| Emitting area on Plane 90° | 0.000000 m2 | | | Glare area at 76° | 0.006716 m2 | | |
| Coordinate system | CG | | | Symmetry Type | Asymmetrical | | |
| Date | 28-09-2015 | | | Maximum Gamma Angle | 180 | | |
| Measurement Distance | 0.00 | | | Measurement Flux | 499.00 lm | | |
| LAMP. LED 6W E14 2700K FROST P40 | | | | | | | |
| C.I.E. | 48 79 96 85 65 | | | D DIN 5040 | B31 | | |
| F UTE | 0.56 E + 0.10 T | | | B NBN | BZ 4 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 | OC | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 |
| OB | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 | OD | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 |

| | | | | | | | | | | |
|----|--------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 103.00 | 102.42 | 97.86 | 89.31 | 77.71 | 64.02 | 49.05 | 33.36 | 17.85 | 4.88 |
| OB | 103.00 | 102.42 | 97.86 | 89.31 | 77.71 | 64.02 | 49.05 | 33.36 | 17.85 | 4.88 |
| OC | 103.00 | 102.42 | 97.86 | 89.31 | 77.71 | 64.02 | 49.05 | 33.36 | 17.85 | 4.88 |
| OD | 103.00 | 102.42 | 97.86 | 89.31 | 77.71 | 64.02 | 49.05 | 33.36 | 17.85 | 4.88 |

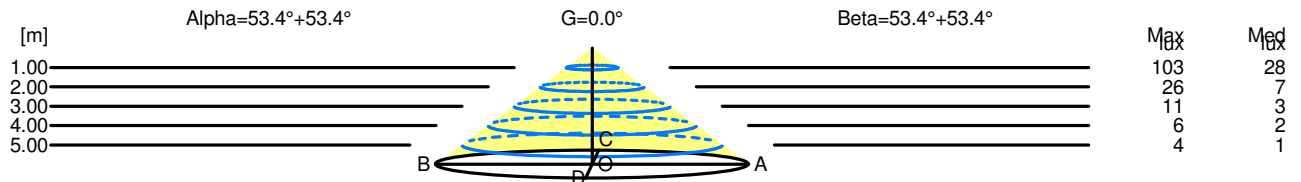

| H[m] | D[m] | Max lux | Med lux | Alpha=53.4°+53.4° | G=0.0 |
|------|-------|---------|---------|-------------------|-------|
| 1.00 | 2.69 | 103 | 28 | | |
| 2.00 | 5.39 | 26 | 7 | | |
| 3.00 | 8.08 | 11 | 3 | | |
| 4.00 | 10.77 | 6 | 2 | | |
| 5.00 | 13.47 | 4 | 1 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=53.4°+53.4° | G=0.0 |
|------|-------|---------|---------|------------------|-------|
| 1.00 | 2.69 | 103 | 28 | | |
| 2.00 | 5.39 | 26 | 7 | | |
| 3.00 | 8.08 | 11 | 3 | | |
| 4.00 | 10.77 | 6 | 2 | | |
| 5.00 | 13.47 | 4 | 1 | | |